

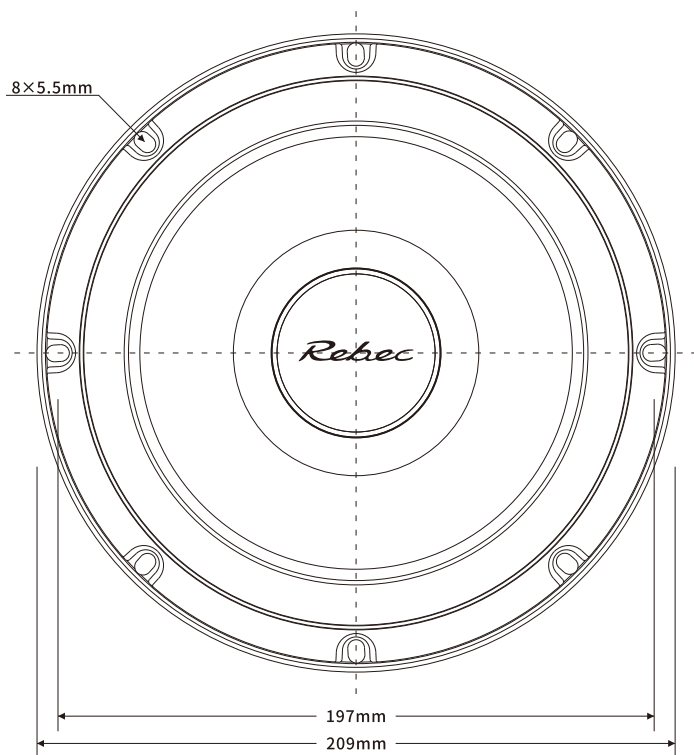





RL200
WOOFER




RL28
TWEETER

SPL vs Freq

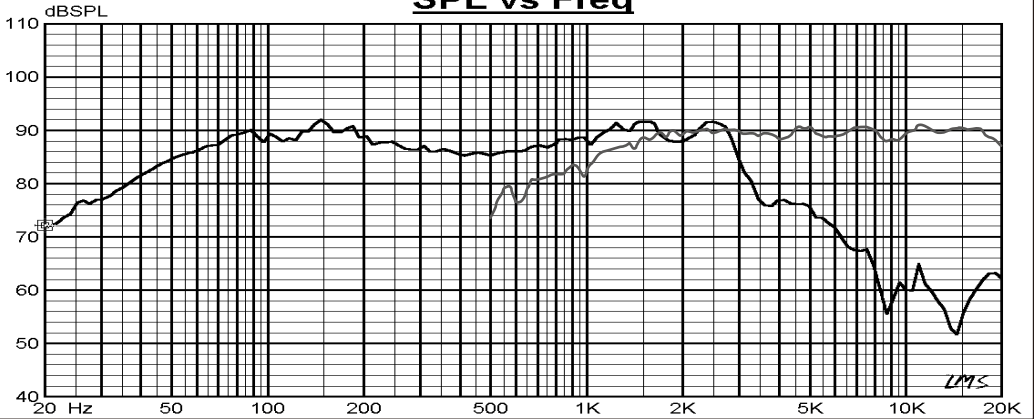

Impedance vs Freq

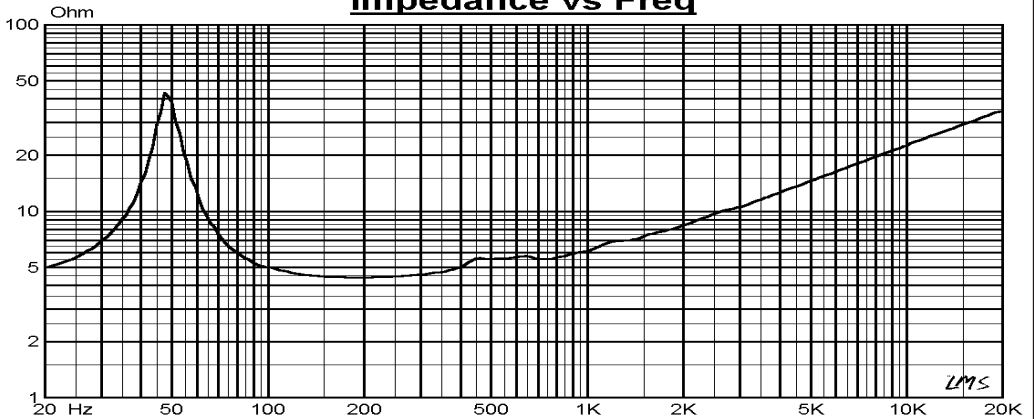

Nominal Impedance	4 Ohm	Frequency Response (T)	1.1KHz-20KHz
Rated Power	75W	Voice Coil Diameter (T)	28mm/1.10in
Maximum Power	150 W	Frequency Response (W)	45Hz-3KHz
Revc	3.6 Ohm	Voice Coil Diameter (W)	30mm/1.18in
Fo	49.252 Hz	Mmd	15.800m Kg
Sd	188.692 cm ²	Mms	17.290 g
Krm	1.243m Ohm	BL	5.083 T
Erm	0.835	Qms	5.930
Kxm	10.333m H	Qes	0.745
Exm	0.657	Qts	0.662
Vas	30.534 Ltr	No	0.473%
Cms	603.928u M/N	SPLo	88.769dB